




# Pyroclassic IV installed in an alcove

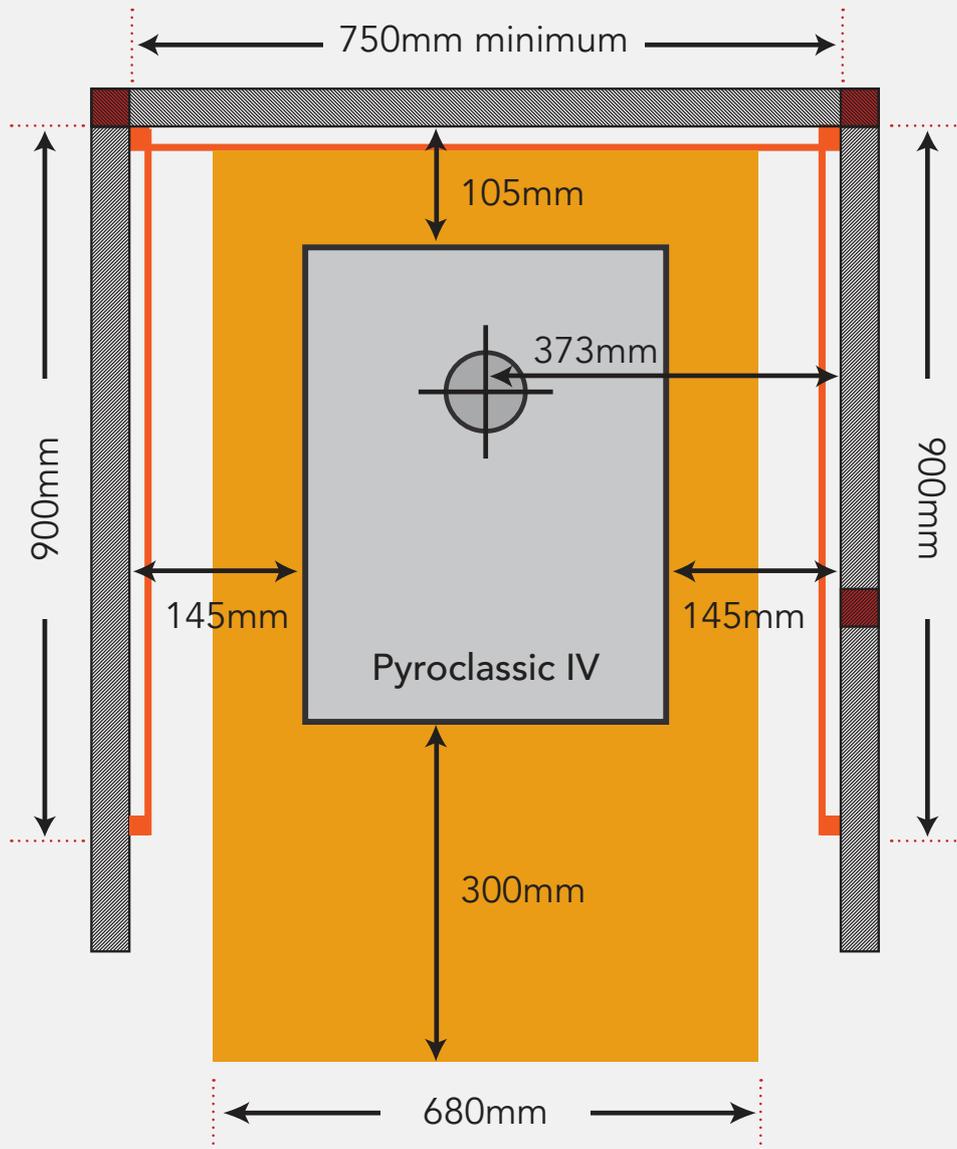

Side screens will only need to protect the combustible lengths of the built wall up to 900mm. If wall is shorter, the screen will be shorter.

The small Raised Woodbin requires a **minimum of 4mm** thick non-combustible material installed underneath to meet all the necessary clearances e.g. tiles or steel.

N.B. All dimensions are minimums. Diagram not to scale.